




Cable fixings Information

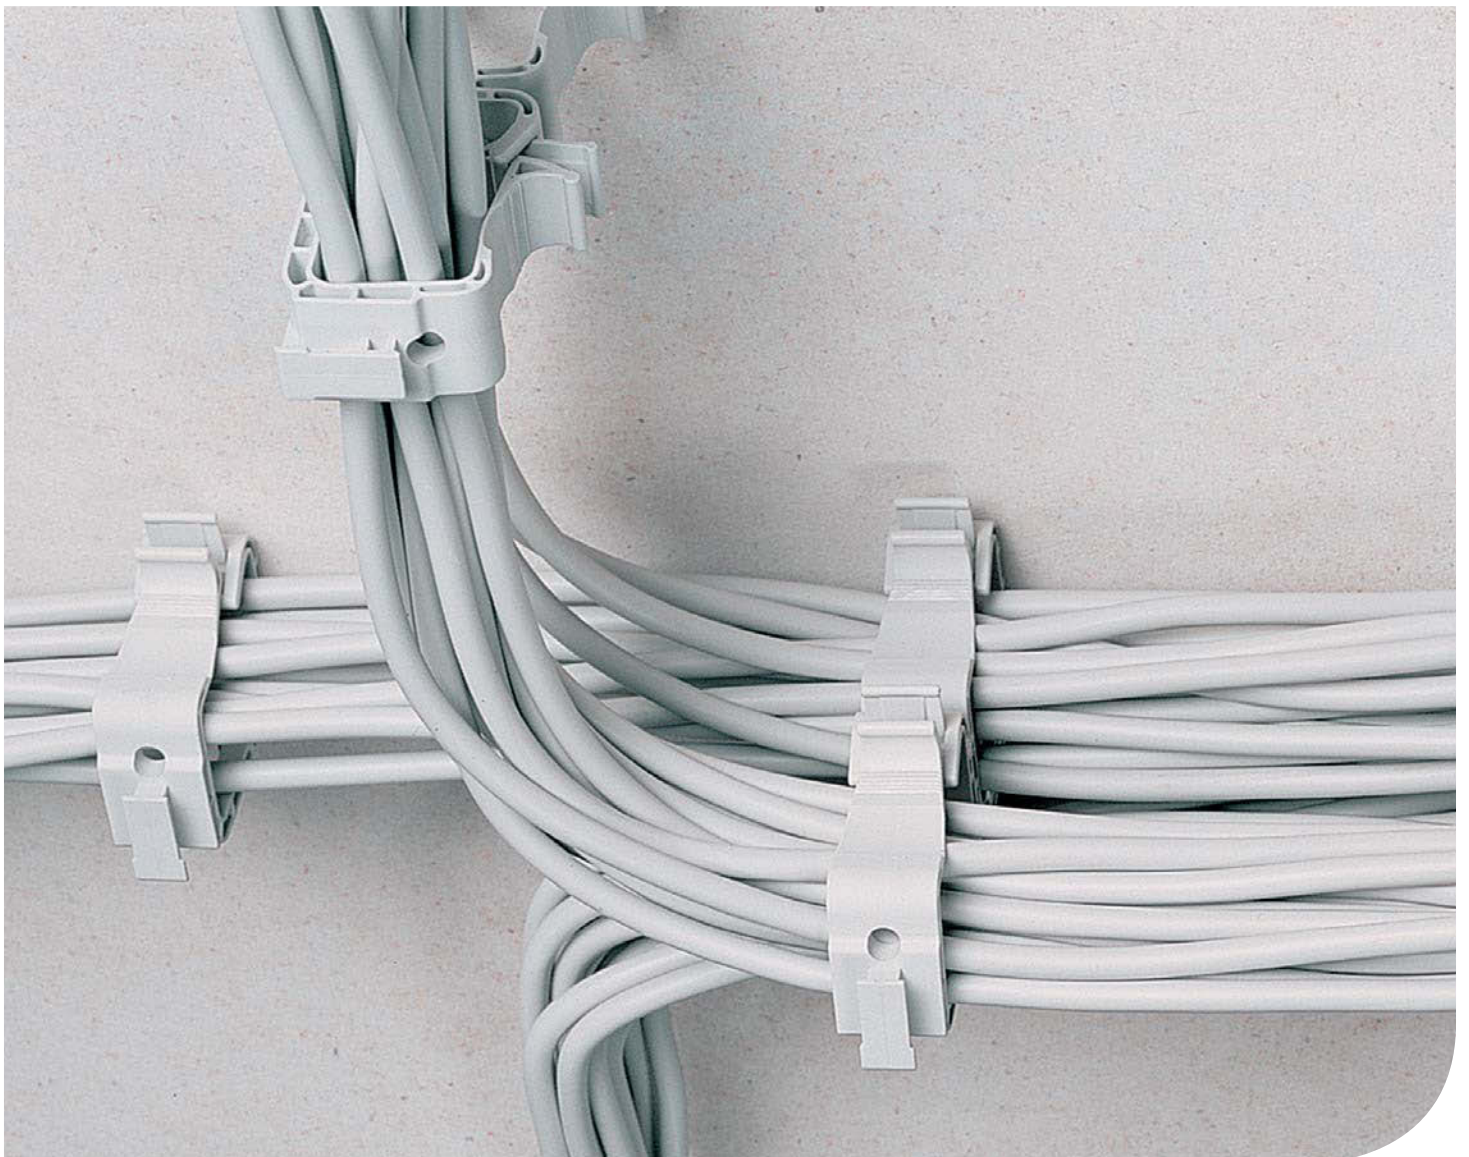

Cable holders

Cable fixings

SH QS Multiple cable holder, metal

Multiple cable holder approved for continuous function E30 - E90, for wall and ceiling mounting. Please see the General Building Inspection Test Certificate (P-MMPA-E-15-012) for further information.

article number	number of cables	weight kg/100
S		
SH 15Q S	15	3,08
SH 30Q S	30	7,20

optional accessories:

- SD-BS** straddling dowel, fire protection
- SAZ** anchor
- SSV** countersunk head screw



SH K Multiple cable holder, plastic

flame-resistant according to fire hazard testing UL94 V-0 and VDE 0471/DIN IEC 695 part 2-1, testing temperature T_{max}

article number	T_{max} °C	colour	number of cables	weight kg/100
PA				
SH 15 K	750	RAL 7035	15	2,88
SH 30 K	750	RAL 7035	30	4,90
SH 15 FWK	960	RAL 7030	15	2,95
SH 30 FWK	960	RAL 7030	30	5,02

optional accessories:

- KOT K** Coupling piece, plastic
- BS K** Quick-mounting clip for all-rounder cable holder, plastic
- BS ND K** Quick-mounting clip for all-rounder cable holder, plastic with nail plug



SH ND K Multiple cable holder, plastic with nail plug

flame-resistant (excl. dowel) according to fire hazard testing UL94 V-0 and VDE 0471/DIN IEC 695 part 2-1, testing temperature T_{max}

article number	T_{max} °C	colour	number of cables	weight kg/100
PA				
SH 15 ND K	750	RAL 7035	15	3,48
SH 30 ND K	750	RAL 7035	30	5,56
SH 15 ND FWK	960	RAL 7030	15	3,88
SH 30 ND FWK	960	RAL 7030	30	6,02

including accessories:

1 x nail / screw dowel 6x50

optional accessories:

- KOT K** Coupling piece, plastic
- BS K** Quick-mounting clip for all-rounder cable holder, plastic
- BS ND K** Quick-mounting clip for all-rounder cable holder, plastic with nail plug



Cable holders

Cable fixings

SHK K Cable holder, plastic

flame-resistant according to fire hazard testing VDE 0471/DIN IEC 695 part 2-1, testing temperature T_{max}

article number	T_{max} °C	colour	number of cables	weight kg/100
PA				
SHK 10 K	750	RAL 7035	10	2,27
SHK 20 K	750	RAL 7035	20	2,70
SHK 40 K	750	RAL 7035	40	4,86



SHK ND K Cable holder, plastic with nail plug

flame-resistant (excl. dowel) according to fire hazard testing VDE 0471/DIN IEC 695 part 2-1, testing temperature T_{max}

article number	T_{max} °C	colour	number of cables	weight kg/100
PA				
SHK 10 ND K	750	RAL 7035	10	3,16
SHK 20 ND K	750	RAL 7035	20	3,64
SHK 40 ND K	750	RAL 7035	40	5,40

including accessories:
1 x nail / screw dowel 6x50



LK K Cable holder, plastic

flame-resistant according to fire hazard testing UL94 V-0 and VDE 0471/DIN IEC 695 part 2-1, testing temperature T_{max}

article number	T_{max} °C	colour	number of cables	weight kg/100
PA				
LK 8 K	750	RAL 7035	8	1,23
LK 10 K	750	RAL 7035	10	1,11
LK 16 K	750	RAL 7035	16	1,73
LK 8 FWK	960	RAL 7030	8	1,10
LK 10 FWK	960	RAL 7030	10	0,89
LK 16 FWK	960	RAL 7030	16	1,60




LK ND K Cable holder, plastic with moulded-in nail plug

flame-resistant (excl. dowel) according to fire hazard testing UL94 V-0 and VDE 0471/DIN IEC 695 part 2-1, testing temperature T_{max}

article number	T_{max} °C	colour	number of cables	weight kg/100
PA				
LK 8 ND K	750	RAL 7035	8	1,92
LK 10 ND K	750	RAL 7035	10	1,68
LK 16 ND K	750	RAL 7035	16	2,63
LK 8 ND FWK	960	RAL 7030	8	2,24
LK 10 ND FWK	960	RAL 7030	10	1,80
LK 16 ND FWK	960	RAL 7030	16	2,68

including accessories:
1 x nail / screw dowel 6x50

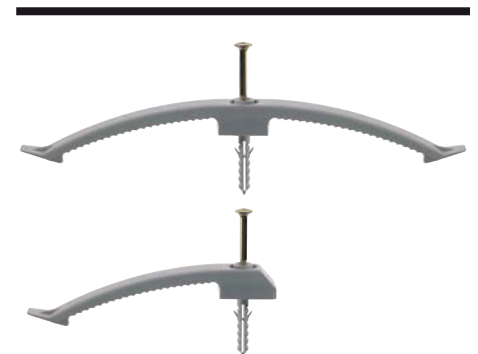

Cable holders | Accessories

Cable fixings

KOT K Coupling piece, plastic

flame-resistant according to fire hazard testing UL94 V-0 and VDE 0471/DIN IEC 695 part 2-1, testing temperature T_{max}


article number	T_{max} °C	colour	weight kg/100
PA			
KOT K	750	RAL 7035	0,36
KOT FWK	960	RAL 7030	0,41



BS K Quick-mounting clip for all-rounder cable holder, plastic

flame-resistant according to fire hazard testing UL94 V-0 and VDE 0471/DIN IEC 695 part 2-1, testing temperature T_{max}

article number	T_{max} °C	colour	weight kg/100
PA			
BS K	750	RAL 7035	0,41
BS FWK	960	RAL 7030	0,43



BS ND K Quick-mounting clip for all-rounder cable holder, plastic with nail plug

flame-resistant (excl. dowel) according to fire hazard testing UL94 V-0 and VDE 0471/DIN IEC 695 part 2-1, testing temperature T_{max}

article number	T_{max} °C	colour	weight kg/100
PA			
BS ND K	750	RAL 7035	0,91
BS ND FWK	960	RAL 7030	0,89




including accessories:
1 x nail / screw dowel 6x50


Assembly examples

Cable fixings

Wall mounting: How to mount multiple cable holder, plastic (SHK) with the beforehand installed quick-mounting clip (BSK)

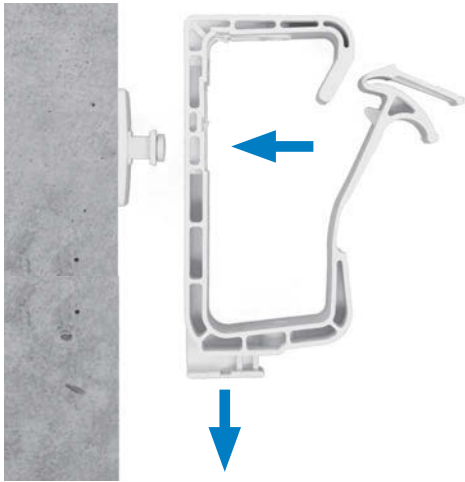

Ceiling mounting: How to mount multiple cable holder, plastic (SHK) with the beforehand installed quick-mounting clip (BSK)

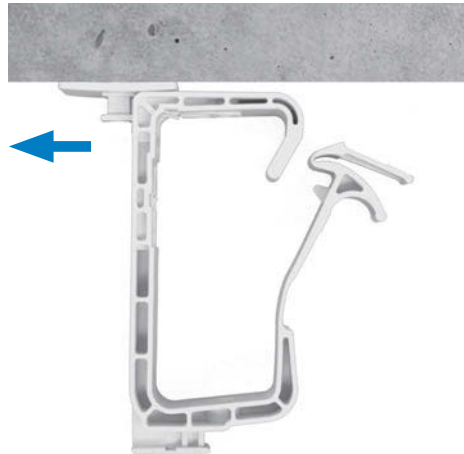

How to connect two cable holders (SHK) that are positioned exactly one above the other by means of the extended base plate



How to connect two adjacent cable holders (SHK) by means of the coupling piece (KOT)





Errors and technical modification subject to change. Reproduction as well as electronic duplication only with our written permission. With appearance of this print all preceding documents lose their validity.

