


B 6

Teleraíl 28x15 mm, ciego

Teleraíl 28x15x2,30 mm, sin perforaciones, ranuras de 12 mm de ancho

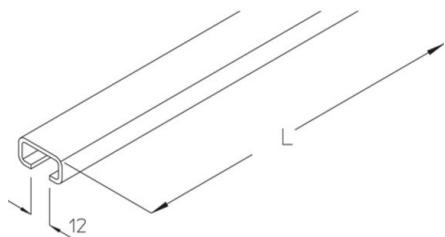

Sin galvanizar

Product	H	B	L	t	G
B 6-30B	15 mm	28 mm	3000 mm	2,30 mm	3,1 kg
B 6-60B	15 mm	28 mm	6000 mm	2,30 mm	6,3 kg

Galvanizado por inmersión en caliente según DIN EN ISO 1461

Product	H	B	L	t	G
B 6-30F	15 mm	28 mm	3000 mm	2,30 mm	3,4 kg
B 6-60F	15 mm	28 mm	6000 mm	2,30 mm	6,7 kg

Acero inoxidable, n.º de material 1.4301 (V2A)

Product	H	B	L	t	G
B 6-30E	15 mm	28 mm	3000 mm	2,30 mm	3,1 kg
B 6-60E	15 mm	28 mm	6000 mm	2,30 mm	6,3 kg


Acero inoxidable, n.º de material 1.4571/1.4404 (V4A)



Product	H	B	L	t	G
B 6-30E4	15 mm	28 mm	3000 mm	2,30 mm	3,4 kg
B 6-60E4	15 mm	28 mm	6000 mm	2,30 mm	6,3 kg

H: Altura
B: Anchura
L: Longitud
t: Espesor de material
G: Peso

DETAILS / APPLICATIONS

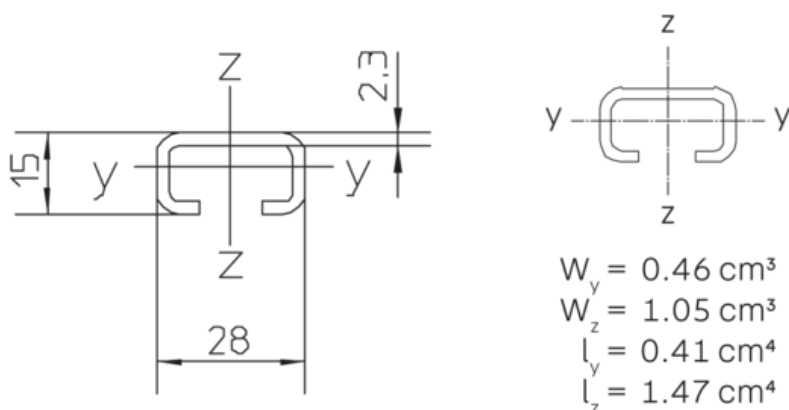

$$\begin{aligned}
 W_y &= 0.46 \text{ cm}^3 \\
 W_z &= 1.05 \text{ cm}^3 \\
 I_y &= 0.41 \text{ cm}^4 \\
 I_z &= 1.47 \text{ cm}^4
 \end{aligned}$$

OPTIONAL ACCESSORIES

HS12, AM12

