


SEMSS

Tuerca hexagonal autoblocante, DIN 985.

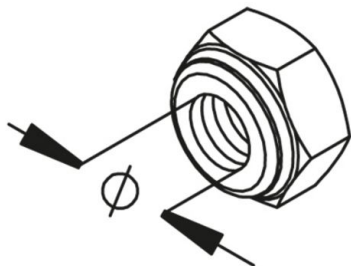

Zincado plateado ISO 4042

Product	Ø	t	SW	G
SEMSS 5	5 mm	5,00 mm	8 mm	0,2 kg/100
SEMSS 6	6 mm	6,00 mm	10 mm	0,2 kg/100
SEMSS 8	8 mm	8,00 mm	13 mm	0,45 kg/100
SEMSS 10	10 mm	10,00 mm	17 mm	1,1 kg/100

Acero inoxidable, n.º de material 1.4301 (V2A)

Product	Ø	t	SW	G
SEMSS 6E	8 mm	8,00 mm	13 mm	0,20 kg/100
SEMSS 8E	8 mm	8,00 mm	13 mm	0,45 kg/100
SEMSS 10E	10 mm	10,00 mm	17 mm	1,1 kg/100

Acero inoxidable, n.º de material 1.4571/1.4404 (V4A)

Product	Ø	t	SW	G
SEMSS 6E4	6 mm	6,00 mm	10 mm	0,2 kg/100
SEMSS 8E4	8 mm	8,00 mm	13 mm	0,45 kg/100
SEMSS 10E4	10 mm	10,00 mm	17 mm	1,0 kg/100



Ø: Diámetro
t: Espesor de material
SW: Ancho de llave
G: Peso

DETAILS / APPLICATIONS

