


## SKL A

Bornas de fijación



Galvanizado por inmersión en caliente según DIN EN ISO 1461

Product	k	P <sub>max</sub>	M	G
SKL AF	5 - 25 mm	10 kN	35 Nm	0,49 kg/Satz
incl.:				
2x SES 10X55F		Tornillo cabeza hexagonal, DIN 933		
2x AM22 M10F		Tuerca deslizante, A 41, KHA 41, KHAL 41		
2x UVS M10X24		Arandela blocante		

Acero inoxidable, n.º de material 1.4571/1.4404 (V4A)

Product	k	P <sub>max</sub>	M	G
SKL AE4	5 - 25 mm	10 kN	35 Nm	0,49 kg/Satz
incl.:				
2x SES 10X55E4		Tornillo cabeza hexagonal, DIN 933		
2x AM22 M10E4		Tuerca deslizante, A 41, KHA 41, KHAL 41		
2x UVS M10X24		Arandela blocante		

**k:** Área de apriete


**P<sub>max</sub>:** Carga máx.

**M:** Momento de apriete

**G:** Peso



## DETAILS / APPLICATIONS

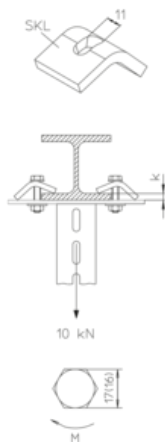

## OPTIONAL ACCESSORIES

A 41, KHA 41, KHAL 41

