


## SKL M

Bornas de fijación



Galvanizado por inmersión en caliente según DIN EN ISO 1461

Product	k	$P_{max}$	M	G
SKL MF	5 - 25 mm	10 kN	35 Nm	0,45 kg/Satz
incl.:				
2x SES 10X55F		Tornillo cabeza hexagonal, DIN 933		
2x SEM 10F		Tuerca hexagonal, DIN 934		
2x UVS M10X24		Arandela blocante		

Acero inoxidable, n.º de material 1.4571/1.4404 (V4A)

Product	k	$P_{max}$	M	G
SKL ME4	5 - 25 mm	10 kN	35 Nm	0,46 kg/Satz
incl.:				
2x SES 10X55E4		Tornillo cabeza hexagonal, DIN 933		
2x SEM 10E4		Tuerca hexagonal, DIN 934		
2x UVS M10X24		Arandela blocante		

**k:** Área de apriete


**$P_{max}$ :** Carga máx.

**M:** Momento de apriete

**G:** Peso



## DETAILS / APPLICATIONS

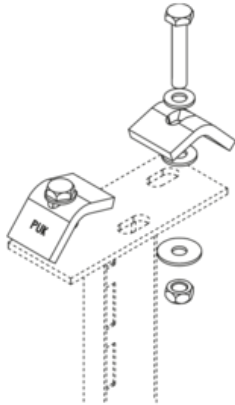

## OPTIONAL ACCESSORIES

KDU 60, KDU 60, KDU 60, KHA 2, HS22

