


US 125

Arandela, DIN EN ISO 7089

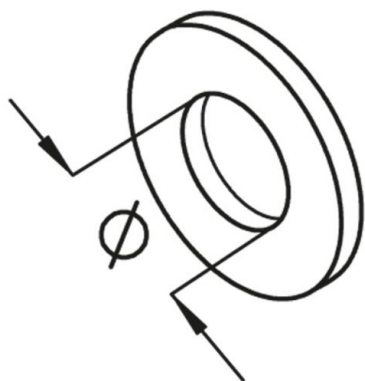

Zincado plateado ISO 4042

Product	D	Ø	t	G
US 8X17	16 mm	8,4 mm	2,00 mm	0,2 kg/100
US 10X21	20 mm	10,5 mm	2,00 mm	0,4 kg/100
US 13X24	24 mm	13 mm	2,50 mm	0,6 kg/100
US 17X30	30 mm	17 mm	3,00 mm	0,9 kg/100

Galvanizado por inmersión en caliente según DIN EN ISO 1461

Product	D	Ø	t	G
US 13X24F	24 mm	13 mm	2,50 mm	0,6 kg/100
US 17X30F	30 mm	17 mm	3,00 mm	0,9 kg/100

Acero inoxidable, n.º de material 1.4301 (V2A)

Product	D	Ø	t	G
US 8X17E	16 mm	8,4 mm	1,60 mm	0,2 kg/100
US 10X21E	20 mm	10,5 mm	2,00 mm	0,4 kg/100
US 13X24E	24 mm	13 mm	2,50 mm	0,6 kg/100



Acero inoxidable, n.º de material 1.4571/1.4404 (V4A)

Product	D	Ø	t	G
US 8X17E4	17 mm	8,4 mm	1,60 mm	0,2 kg/100
US 10X21E4	21 mm	10,5 mm	2,00 mm	0,2 kg/100

D: Diámetro
Ø: Diámetro
t: Espesor de material
G: Peso

DETAILS / APPLICATIONS

