


## KHA 2

Teleraíl 50x31 mm, perforado

Teleraíl 50x31x3,25 mm, con perforaciones continuas de 13x26, ranuras de 22 mm de ancho

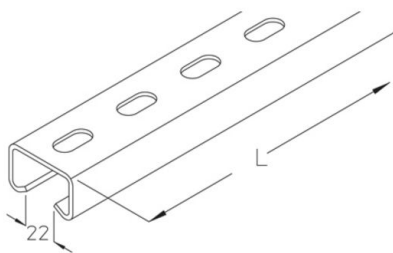



Galvanizado por inmersión en caliente según DIN EN ISO 1461

Product	H	B	L	t	G
KHA 2-05F	31 mm	50 mm	500 mm	3,25 mm	1,5 kg
KHA 2-10F	31 mm	50 mm	1000 mm	3,25 mm	3 kg
KHA 2-15F	31 mm	50 mm	1500 mm	3,25 mm	4,5 kg
KHA 2-20F	31 mm	50 mm	2000 mm	3,25 mm	6 kg
KHA 2-30F	31 mm	50 mm	3000 mm	3,25 mm	9 kg
KHA 2-60F	31 mm	50 mm	6000 mm	3,25 mm	17,9 kg

**H:** Altura  
**B:** Anchura  
**L:** Longitud  
**t:** Espesor de material  
**G:** Peso

## DETAILS / APPLICATIONS



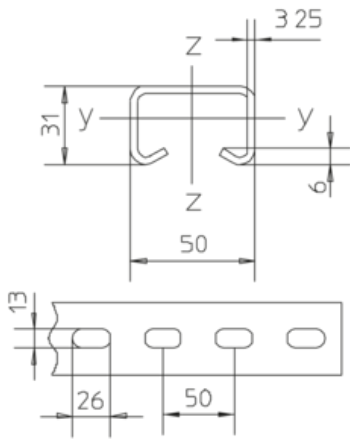

$$W_y = 2.31 \text{ cm}^3$$

$$W_z = 5.40 \text{ cm}^3$$

$$I_y = 3.77 \text{ cm}^4$$

$$I_z = 13.49 \text{ cm}^4$$

## OPTIONAL ACCESSORIES

HS22, SKS H

